



HIGH-Q WALL OUTLET SAT-IF

- Applicable for SAT-IF and terrestrial transmission
- Band filter for FM with low loss and high output isolation
- Loop through models: **SDD....QD** with DC-pass and diode isolated, e. g. for digital unicable solution with MSW or MSU
UNICABLE READY

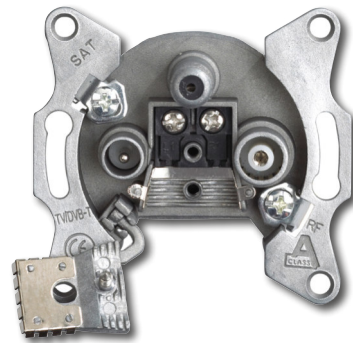

| Type | Frequency range | SEA 2400 Q | SEA 2400 QR | SDD 2411 QD | SDD 2414 QD | SDD 2419 QD | SDD 2424 QD |
|-----------------------|-------------------------|----------------------|-----------------|---------------------|---------------------|---------------------|---------------------|
| Item No. | | 57001528 57001598 | 57002344 | 57002346 | 57001442 | 57002345 | 57001443 |
| | | | | | | | |
| Description | | Terminal | Terminal | Loop through | Loop through | Loop through | Loop through |
| Attenuation | | | | | | | |
| TV OUT (IEC-male) | dB 4-68 / 125-862 MHz | 1.0 - 2.0 | 8.5 | 12 | 19 | 14 | 24 |
| FM OUT (IEC-female) | dB 87.5-108 MHz | 1.0 | 8.5 | 16 | 19 | 17 | 24 |
| SAT OUT (F-female) | dB 950-2200 MHz | 1.5 | 7 | 11 | 19 | 14 | 24 |
| Trunkline OUT | dB 5-862 / 950-2200 MHz | - | - | 3.5 / 6 | 1.9 / 4.0 | 3 / 5.5 | 1.7 / 3.5 |
| Isolation | 5-65 / 85-862 MHz | | | | | | |
| between the connector | dB SAT <-> TV/RF | 30 | 20 | 20 | 25 | 20 | 25 |
| between the connector | dB TV <-> RF | 25 | 26 | 20 | 24 | 20 | 24 |
| between the connector | dB OUT <-> SAT/TV | - | - | 18 | 22 | 18 | 22 |
| DC pass | SAT | 13/18 V, 22 kHz | 13/18 V, 22 kHz | 13/18 V, 22 kHz | 13/18 V, 22 kHz | 13/18 V, 22 kHz | 13/18 V, 22 kHz |
| Weight | kg | 0.1 | 0.1 | 0.1 | 0.1 | 0.1 | 0.1 |

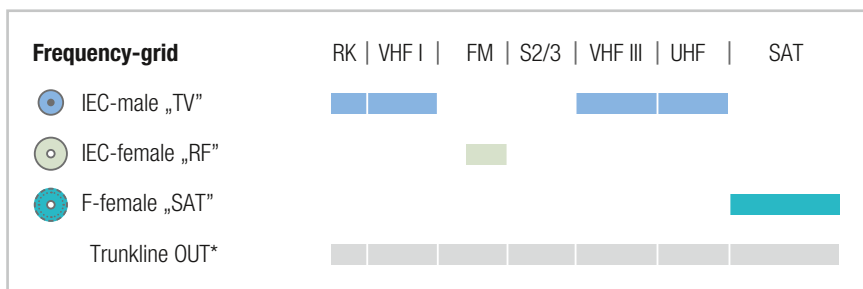

*only SDD 24xx QD