



# HIGH-Q WALL OUTLET SAT-IF

- Applicable for SAT-IF and terrestrial transmission
- Band filter for FM with low loss and high output isolation
- Loop through models: **SDD....QD** with DC-pass and diode isolated, e. g. for digital unicable solution with MSW or MSU  
UNICABLE READY

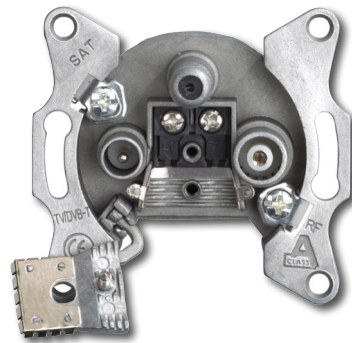

Type	Frequency range	SEA 2400 Q	SEA 2400 QR	SDD 2411 QD	SDD 2414 QD	SDD 2419 QD	SDD 2424 QD
Item No.		57001528 57001598	57002344	57002346	57001442	57002345	57001443
<b>Description</b>		<b>Terminal</b>	<b>Terminal</b>	<b>Loop through</b>	<b>Loop through</b>	<b>Loop through</b>	<b>Loop through</b>
<b>Attenuation</b>							
TV OUT (IEC-male)	dB 4-68 / 125-862 MHz	1.0 - 2.0	8.5	12	19	14	24
FM OUT (IEC-female)	dB 87.5-108 MHz	1.0	8.5	16	19	17	24
SAT OUT (F-female)	dB 950-2200 MHz	1.5	7	11	19	14	24
Trunkline OUT	dB 5-862 / 950-2200 MHz	-	-	3.5 / 6	1.9 / 4.0	3 / 5.5	1.7 / 3.5
<b>Isolation</b>	5-65 / 85-862 MHz						
between the connector	dB SAT <-> TV/RF	30	20	20	25	20	25
between the connector	dB TV <-> RF	25	26	20	24	20	24
between the connector	dB OUT <-> SAT/TV	-	-	18	22	18	22
DC pass	SAT	13/18 V, 22 kHz	13/18 V, 22 kHz	13/18 V, 22 kHz	13/18 V, 22 kHz	13/18 V, 22 kHz	13/18 V, 22 kHz
Weight	kg	0.1	0.1	0.1	0.1	0.1	0.1

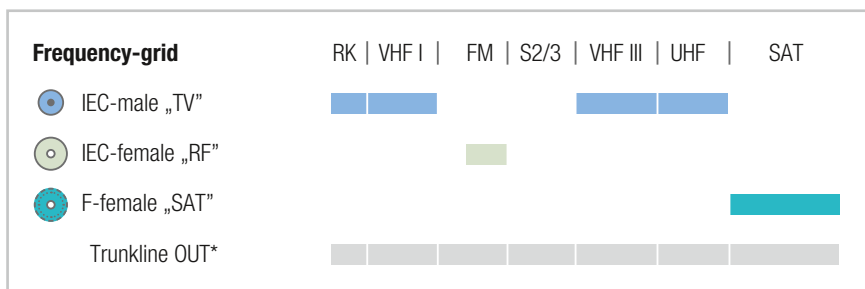

\*only SDD 24xx QD